



Production and sale
Flexibility and adaptability to customers' needs
Logistics and assistance service
Product reliability and delivery punctuality

3 News

High speed doors for ATEX environments

Self repairing high speed roll up door **ALUMINA**, with anodized aluminium frames and **electronic inverter** control box, optical encoder for **curtain movement position**

Flexible swing door with 220V **monophase** automation

Nice to meet you!


Since 1983 our company has been manufacturing high speed doors, offering a wide range of high quality products, simple to install, reliable and long lasting and always delivered on time.

Our company has great goals, first of all we want to be innovative, develop and present new models of our products to become the excellence on the market.

We are well-known and appreciated for the following features:

Production and sale of a complete range of high speed doors: roll up doors, self repairing or special for the food industry or ATEX environments, high speed fold up doors, flexible curtains or flexible swing doors.

Flexibility and adaptability to customers' needs in order to design and manufacture high speed doors for every sector: logistic sector, industrial sector, commercial activities, health environments, food or ATEX sectors.

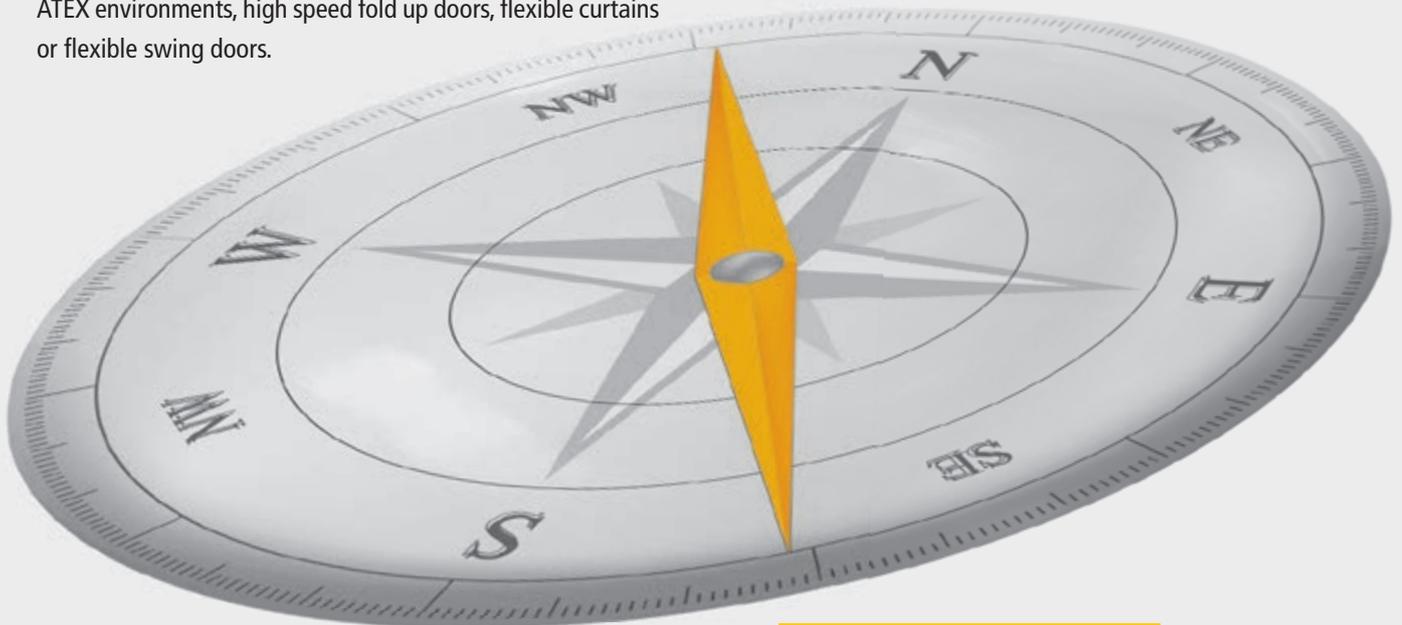

Product reliability and delivery punctuality because our company is made up of motivated people, in order to offer the best reliable product, easy and fast to assemble, with prompt delivery.

Logistics and assistance service because we have a warehouse with lots of equipment for the maintenance or manufacture of industrial doors.

FlexGO Flexible swing door with manual or automatic opening

The cheapest solution, also suitable for special rail or huge passages

New

INNOVATION – with Flex **Electro** 220V monophasic automation



The flexible swing doors are the best solution to divide working areas in industrial and commercial sites. They are particularly suitable for installation in frequently walkway and escape routes areas; so you can find them also in the food industry and in supermarkets.


There are two available models: a version with manual opening and spring automatic closing and an automatic version with pneumatic and electro-pneumatic devices for automatic opening via touch or remote control (for example button, tie-rod, radar, etc.).

Special solutions are mainly used for closing large passageways with peculiar features, such as depots and rail and tram shops with aerial transmission lines.

MAIN FEATURES

Structure	FlexGO doors are built with a monolithic structure available in different model depending on door dimension. The standard galvanized structure can be realized in both Stainless Steel or Powder coated paint to fit special environments requirements.
Flexible panels	Made in PVC with plastic additive for standard environments and low temperature application (up to -35° C) for a cristal transparency and high flexibility. Double layer Black Rubber for the most aggressive environments.
Automatic closing system	Door leaf is equipped with an internal torsion spring mechanism for automatic closing after passages.
Three available solutions	Transparent flexible PVC with reinforcement in the most solicited parts. Available in different thickness from 5 up to 7 mm
	Mix A , Flexible PVC panels with lower part in both colored PVC grey or yellow than in double layer black rubber. Up to 8 mm thickness
	Mix B , Flexible panels made with colored PVC grey or yellow than in double layer black rubber with transparent window for visibility
Certification	UNI EN13241-1 EC Certified

Flexible swing door with automatic opening

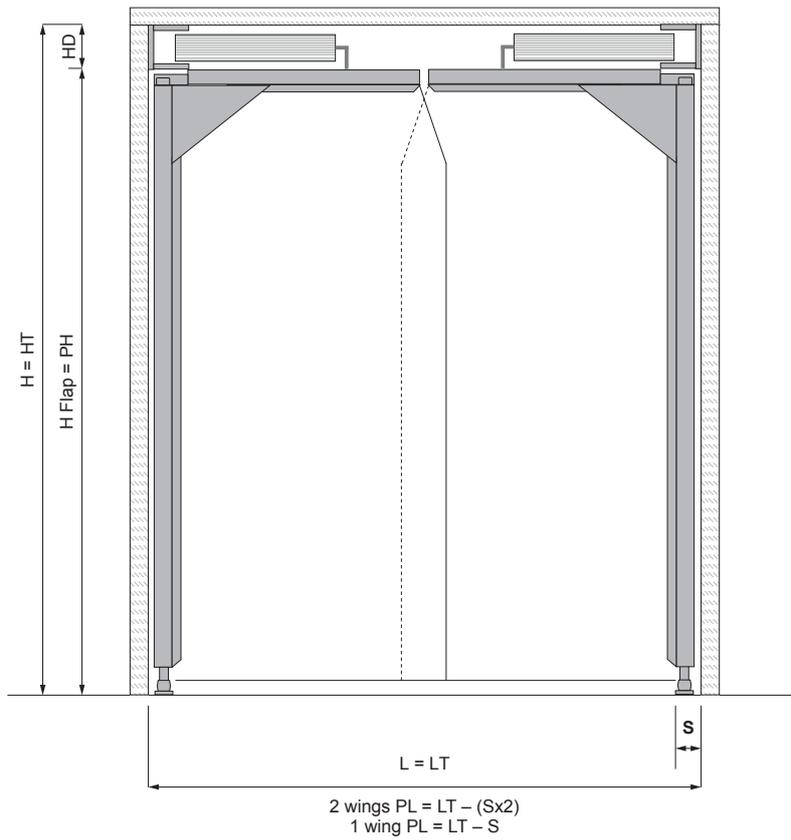


Bi-Directional Pneumatic Device APS	HD	Minimum Width (2 wings)	LT x HT
Contact 50-150	135	1240	< 10 sm
Contact 50-200	135	1440	< 10 sm
Contact 63-250	135	1650	< 16 sm

Mono-Directional Electropneumatic Device APP	HD	Minimum Width (2 wings)	LT x HT
AM50	135	1240	< 10 sm
AM63	135	1440	< 16 sm
AM100DE	200	n/a	< 16 sm

Profile	Wing obstruction when open S (mm)
Type 1	66
Type 2	72
Type 6	83

Flexible swing door with manual opening

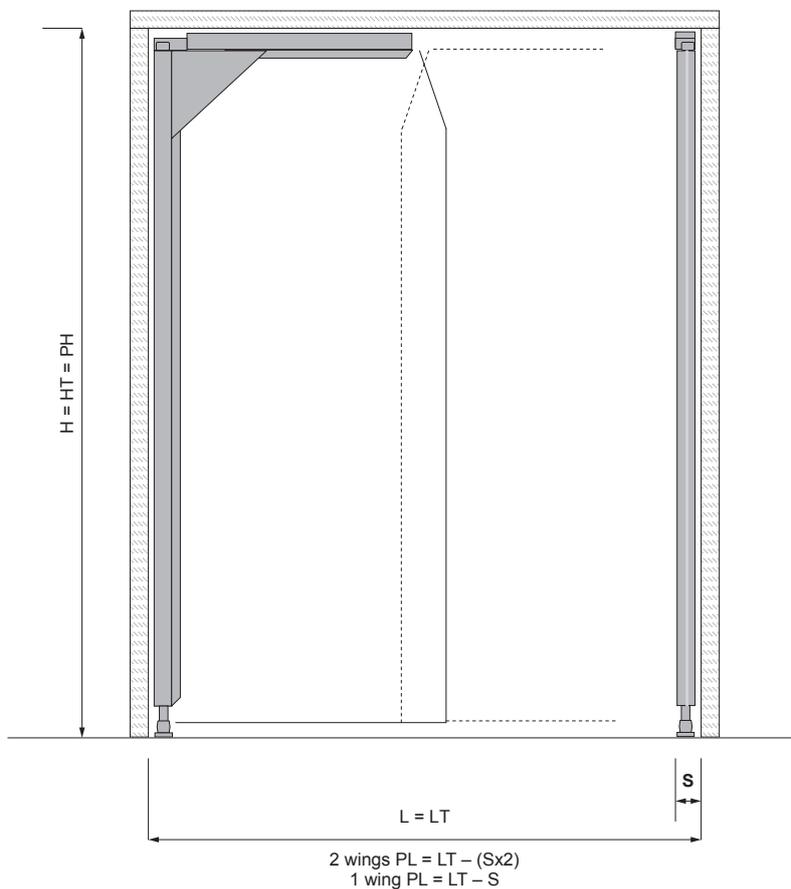

Profile	Wing obstruction when open S (mm)
Type 1	66
Type 2	72
Type 6	83